

RESI **FIT**®

FAST FIT DOOR KIT

THE ULTIMATE RESIDENTIAL DOOR KIT

**RANGE &
INSTALLATION
GUIDE**



EXPERTISE YOU CAN RELY ON FROM JELD-WEN

**JELD-WEN IS ONE OF THE UK'S LARGEST
INTERIOR DOOR MANUFACTURERS.**

With generations of craftsmanship and decades of experience supplying to leading housebuilders and contractors, we offer quality, reliability and service you can count on. Whether you require standard or fire-rated door kits or doorsets, we have a wide range of products to suit any project, all manufactured or assembled in the UK.

90 YEARS

of experience and expertise

DEDICATED SERVICE

delivering the highest quality

UK'S LEADING

interior door manufacturer

CONTENTS

Introducing RESIFIT®	
Door kits from JELD-WEN	4
Why choose a RESIFIT® door kit?	6
Superior service	8
The complete door kit	10
The door range	12
Opening up the possibilities	14
Installation guide	16-19
Spare parts	20
Integral garage doorsets	22
Accreditations	26
Quality maintenance	27
General information	28





INTRODUCING **RESIFIT®** **DOOR KITS** FROM JELD-WEN

**RESIFIT® DOOR KITS – THE
QUICKEST, MOST CONVENIENT
WAY TO INSTALL HIGH QUALITY
INTERIOR DOORS – WHATEVER
YOUR HOUSE BUILDING
PROJECT REQUIRES.**


Our door kits contain everything needed to install doors and linings quickly and accurately every time. They are designed specifically for use in new build properties, with fully machined and fitted components ready for site installation. They provide a cost-effective installation solution that will significantly reduce labour time when skilled labour is at a premium.

WHY CHOOSE A RESIFIT® DOOR KIT?

THIS ONE-STOP RESIDENTIAL SOLUTION IS INSPIRED BY GENERATIONS OF CRAFTSMANSHIP AND DECADES OF EXPERIENCE IN SUPPLYING TO HOUSEBUILDERS AND CONTRACTORS JUST LIKE YOU.

There's a wide range of options to choose from and an excellent all-round service package. You'll get a perfect product every time, with all the high standards and lasting quality you would expect from the UK's leading interior door manufacturer.

CAMBRIDGE



QUALITY

FROM THE UK'S LEADING INTERIOR DOOR MANUFACTURER

- Supported by generations of craftsmanship and expertise
- All doors kits are manufactured or assembled in the UK
- A perfect product every time.



CONVENIENCE

EVERYTHING YOU NEED, EXACTLY WHEN YOU NEED IT

- Doors and linings can be delivered separately to your project schedule requirements
- Potential damage can be reduced by calling off the door leaves to your build schedule.



CHOICE

THE RIGHT PRODUCT FOR YOUR PROJECT

- There's a wide range of door designs and finishes available to choose from
- Designed specifically to suit your needs
- Choice of partition widths with fire and non-fire specification.



SPEED

FIT IN JUST 20 MINUTES

- Door kits come complete with all the lining components primed and pre-machined with hinges already fitted
- The doors can be handed on-site, so no pre-order handing information is required.

SUPERIOR SERVICE

WE DON'T STOP AT SUPPLYING YOUR DOOR KIT.

We go further, providing excellent support and a wide range of services to make your project run as smoothly as possible.

HERE FOR YOU FROM START TO FINISH

Throughout your project a JELD-WEN representative will be available to answer your questions, provide samples and offer additional information.

EXPERT ADVICE

Decades of experience means we can provide expert technical support on everything from certification issues to Building Regulation matters.

DEDICATED RESOURCES

National and regional account managers will act as individual points of contact for sales and escalated problems. Our internal team will work with you to fulfil your scheduling and estimating requirements.

LITERATURE AND MARKETING

We'll provide installation guides to assist fitters on-site, including information to make it easy to order spare parts.

LEAD TIMES & DELIVERY

JELD-WEN door kits have a 15-19 day lead time for both linings and doors and will be delivered to site in plot lots ready to install.

GUARANTEES

This product is designed to offer lasting value to the homeowner and comes with the following guarantees:



HOW TO ORDER AND FIT



1. Select the door kit specifications and styles you require




2. Send your project schedule and plans to our estimating and scheduling team




3. Receive your quote and place your order




4. Call off the pre-machined linings as required




5. Install the linings



6. Call off the pre-machined doors ready for final fix



7. Snap the doors onto the hinges and adjust for a perfect fit



8. Fit handles of your choice and finish to requirements.

THE COMPLETE RESIFIT® DOOR KIT

RESIFIT® door kits are designed to be a quick, simple, hassle-free solution for any residential new build project. All the main components are included* – so you can line, fit and finish with total efficiency.

DOORS

- Pre-machined and fitted with CE-marked standard or fire hinges
- Supplied with female hinges ready to clip into linings
- Dummy doors available to speed up installation.

LATCH

Choice of standard or bath latches (Please specify when ordering)

REVERSIBLE HINGES

Choice of white metal or chrome

25MM PRIMED MDF LININGS

- Choice of lining widths available in fire and non-fire specifications: 77, 100, 125, 150mm
- Hinge-side linings supplied with three pre-fitted male hinges
- Latch-side linings supplied pre-machined for the latch keep (supplied with dust cap loose in pack).

PRIMED MDF STOPS

FIRE DOOR KITS



- Fire resisting door kits are designed and manufactured under the BWF-Certifire scheme and have been independently tested and certified to provide adequate fire protection
- Fire resistant door kits are supplied with FD30 doors and linings fitted with intumescent strips to allow up to 30 minutes fire resistance.

THE RESIFIT® DOOR RANGE

OUR RESIFIT® DOOR KITS ARE AVAILABLE WITH A RANGE OF DOOR STYLES, SIZES, FINISHES AND CORE TYPES.

MOULDED DOORS

Our moulded doors are available in a choice of smooth or woodgrain finishes, offering both traditional and contemporary designs with glazed and fire door options.

- Supplied edge-banded on two vertical edges
- Supplied undercoated as standard with fully finished option available
- Middleweight and FD30 moulded cores available.




NEWARK

DOOR DESIGNS

S Smooth finish **W** Woodgrain finish



CORE TYPES



SIZE AVAILABILITY

DOOR SIZE (mm)	TIMBER STUD WALL STRUCTURAL OPENING		BRICKWORK STRUCTURAL OPENING	
	W	H	W	H
610 x 1981	676	2029	712	2047
686 x 1981	752	2029	788	2047
762 x 1981	828	2029	864	2047
838 x 1981	904	2029	940	2047
864 x 1981	930	2029	966	2047
1220* x 1981	1289	2029	1325	2047
1372* x 1981	1441	2029	1477	2047

*Denotes paired doors

FINISH OPTIONS



OPENING UP THE POSSIBILITIES

WHATEVER THE SPECIFICS OF YOUR PROJECT, RESIFIT® DOOR KITS ARE VERSATILE ENOUGH TO MEET THE CHALLENGE.

UNDERSIZED DOORS

A selection of our most popular door styles are available undersized for use as cupboard doors.

- Available in a selection of door types
- Choose from 1200mm and 1700mm high door options
- Available in a choice of our popular door designs to achieve a consistent look throughout the property.



ATHERTON S BOSTONIAN W CAMBRIDGE S



ROCKPORT S FLUSH S

RAKED DOORS

To maximise storage space underneath stairs, we can supply raked solid core paintgrade flush doors.

- Supplied with blank linings that can be cut to the required size
- Hinges and latch keep supplied loose for fitting onsite.



PAIR DOORS

Where a pair of doors are required either to divide rooms, or for wardrobe storage, we can supply a door kit to fit.

- We'll supply two hinged jambs instead of one
- The door leaves supplied pre-machined for the latch with latch and keep supplied loose for fitting on-site
- Choose any of our standard doors to suite the look throughout the property.



INSTALLATION GUIDE

TO FIT OUR INTERNAL DOOR KIT AS QUICKLY AND EASILY AS POSSIBLE, FOLLOW OUR SIMPLE INSTALLATION GUIDE.

Please note: Doorway aperture openings should be made 64mm wider, and 52mm taller than the doors. This will allow for packing around the frame.




1

Fit the dust cap and latch keep to the latch side MDF jamb liner.



4

Use a spirit level to check that the jambs are square and plumb, if necessary use packers to adjust.

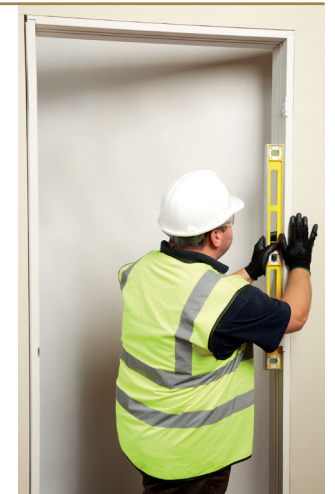

2

To assemble the frame lay the MDF head and linings on a level surface. Bear in mind the required door handing and position the hinge jamb appropriately. Pre-drill pilot holes through the top of the head, and screw into the jambs using 32mm length screws (maximum).




5

Temporarily fix the hinge jamb in place using two 75mm long (minimum) screws.



3

Offer the assembled frame up to the opening.



6

Take the door provided and remove the screws and cams from each of the pre-fitted female hinges.



8

Re-secure the cams back onto the hinges.



9

Use a spirit level to check the head of the frame is square and plumb, and adjust where necessary by packing the underside of the jambs.



7

Hang the door by sliding it onto the male hinges that are pre-fitted on the frame.



10

Test the door closes in the frame correctly, ensuring that the door does not bind or catch.



11

Once confirmed the door kit is square in the opening, open the door and complete the fixing of the jambs by screwing through the predrilled holes into the wall using 75mm screws.



12

Adjustments can be made using a cranking tool. To ease the door leaf towards or away from the jamb, apply slight pressure to the tops and bottoms of each hinge knuckle. Ensure that a consistent gap is achieved all around the door. Ensure all packers are pushed up into the gaps.



13

Any slight gaps around fire door frames should be filled with a mineral wool or intumescent mastic paste in accordance with BS 8214:2008.

14

Fix the MDF stops in position using appropriate grab adhesive and pins. Stops are reversible, and care should be taken to position these according to the thickness of the door (i.e. 35 or 44mm).



15


Doors should be hung at the final fix stage, limiting the opportunity for damage or distortion (swelling) during the building process. Carefully remove packaging.

Doors can be hung left or right hand. To reverse the handing, remove the female hinges and latches, and rotate through 180 degrees before re-fitting on the doors.




SPARE PARTS

63mm STANDARD LATCH

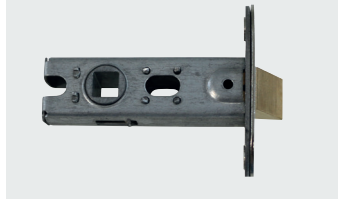


Code: STD LATCH

DUST CAP AND KEEP (STANDARD LATCH)



Code: DUSTCAPS

63mm BATHROOM LOCK




Code: BATHLATCH

DUST CAP AND KEEP (BATHROOM LATCH)




Code: DUSTCAPB

METAL MALE HINGE



White: DKHINGMW
Chrome: DKHINGMC

METAL FEMALE HINGE AND ADJUSTER



35mm White: DKHINGF35W
35mm Chrome: DKHINGF35C
44mm White: DKHINGF44W
44mm Chrome: DKHINGF44C

CRANKING TOOL



Code: CRANKT

SET OF PRIMED DOOR STOPS



INTUMESCENT STRIPS
10x4mm, 2.1m LENGTH (WHITE)



OAKFIELD

PART Q INTEGRAL GARAGE DOORSETS

JELD-WEN OFFERS A COMPLETE DOORSET SOLUTION FOR INTEGRAL GARAGE DOOR APPLICATIONS, WHICH MEET APPROVED DOCUMENT Q STANDARDS.



ADJUSTABLE KEEP

1 Door keeps are fully adjustable when adjusting on site.



MULTI-POINT LOCK

2 3-point multi-point espagnolette lock.




HANDLE

3 Lever handle supplied and available in satin silver or chrome (optional).



CE CERTIFIED HINGES

4 Supplied with three Grade 13 hinges in a choice of satin silver or chrome (optional).



DROP DOWN SEAL

5 A lorient drop down seal is supplied for improved acoustic performance.



INTUMESCENT & ACOUSTIC SEALS

6 Fitted into the head and jambs of the frames, are intumescent strips including smoke and acoustic seals.

DOOR DESIGNS

S Smooth finish **W** Woodgrain finish



NEWBRIDGE **S** NEWARK **W** CASTLETON **S** ROCKPORT® **S** ATHERTON **S** CAMBRIDGE **S** BOSTONIAN **W** OAKFIELD **W**

SIZE AVAILABILITY

DOOR SIZE IMPERIAL / METRIC	STRUCTURAL OPENING SIZE	CLEAR OPENING WIDTH FD30
1981x838mm (6'6" x 2'9")	2051x938mm	784mm
1981x864mm (6'6" x 2'10")	2051x964mm	810mm
1981x914mm (6'6" x 3'0")	2051x1014mm	860mm
Metric 2040x926mm	2110x1026mm	872mm

HINGE

Doorsets are supplied with three 100mm Grade 13 hinges.



Satin silver

DOOR HANDING

Supplied assembled and handed as per your order. **Handing is viewed from the outside of the door with the door opening away from you.** Please state whether you require right or left hand when ordering.




Left hand hung

Right hand hung

FRAME

FD30

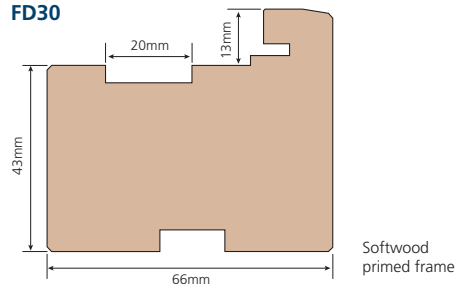

Softwood primed frame

HANDLE & CYLINDER



Satin silver handle and thumbturn



ACCREDITATIONS



RESPONSIBLE SOURCING

JELD-WEN aims to source all its timber according to recognised chain of custody schemes, and many products are available with Forest of Stewardship® Council (FSC®) certification and Programme for the Endorsement of Forest Certification (PEFC).



MADE IN THE UK

Like you, we believe that UK manufacturing is unparalleled in quality and craftsmanship. That's why all JELD-WEN door kits are made in the UK.



TRIED AND TESTED

All our products undergo rigorous testing and we carry a number of third party accreditations and affiliations that ensure our products are of the highest standards for installation.



PREMIUM QUALITY

We know how important quality is to you. That's why we're continually developing our products and services to achieve the high standards that you would expect from the UK's largest door manufacturer. Our products are formally assessed and certified under ISO 9001 quality standards.



BWF-CERTIFIED

All our fire doors are independently assessed to meet BWF-Certified standards.

QUALITY MAINTENANCE

QUALITY IS OUR TOP PRIORITY – WE KNOW WHAT IT MEANS TO YOU AND WE PRIDE OURSELVES ON DELIVERING IT IN EVERYTHING WE DO.

That's why, from the way products are stored and handled to the installation process, we encourage good practice. It not only maintains our levels of quality, but also avoids damage and saves on potential cost.



GENERAL INFORMATION

DELIVERY

JELD-WEN internal door kits should arrive on site shortly before planned installation; this will avoid unnecessary damage through handling and general site conditions.

Products should be thoroughly checked when delivered to ensure no damage has occurred during transport, and that the quantities, sizes and specifications match those ordered. Any damages must be reported within 48 hours of delivery.

STORAGE

Linings and doors should be stored in a cool dry place and protected from dirt and damage. The product must not be stored outside or in buildings that are being plastered or have recently been completed. Store the product flat on a level surface such as a pallet that has a sufficient floor clearance to allow air circulation.

Wherever possible store door kits in their original packaging until ready for installation. Do not store in unventilated containers.

Take particular care with glazed doors as glazing beads may leave marks on the face of the doors if not appropriately protected.

UNLOADING

Ensure doors are lifted clear of the stack and never slide or drag them to avoid damage to the face of the door. Avoid stacking more than one pallet of doors on top of each other. Many doors weigh more than 15kg and may require a two person lift.

DECORATION

If doors are supplied undercoated they should be decorated in accordance with British Standard Code of Practice BS6150: 2006 and BS8000 Part 5:1990. The paint manufacturer's instructions must be followed. All surfaces must be treated (sealed) at the same time to prevent distortion from moisture imbalance.

A base coat paint primer is not a seal.

Decoration should be carried out immediately following installation to seal the door and reduce the risk of distortion. We recommend at least two coats making sure the first coat is completely dry before applying the second.

MAINTENANCE

All ironmongery should be lubricated on a regular basis to ensure smooth and correct functioning. JELD-WEN door kits can be cleaned using a damp cloth; none abrasive materials should be used as this can damage the face of the door.

TERMS AND CONDITIONS

For full terms and conditions along with further information on guarantees please visit our website: www.jeld-wen.co.uk



WHATEVER YOUR PROJECT,
WE ARE CONFIDENT THAT WE
HAVE A DOOR KIT FOR YOU.
TO FIND OUT MORE
CALL: **0114 254 2156**

JELD-WEN UK LTD

Retford Road
Woodhouse Mill
Sheffield
South Yorkshire
S13 9WH

doorkits@jeldwen.com



FAST FIT DOOR KIT