

REAL WOOD VENEER

STANDARD CORE

– INTERNAL DOOR

SPECIFICATIONS

Construction

Flush face with softwood stiles and rails with complementing hardwood lippings. Over veneered with a cellular core.

Door Codes

Ash	ASHOV
Beech	BCHOV
Koto	KOTOV
Sapele	SAPOV
Walnut	WALOV
White Oak	WOKOV

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3.2mm veneered wood fibre board.

Components

Stiles:	Softwood min 28mm (nominal width)
Rails:	Softwood min 28mm (nominal width)
Core:	Cellular
Lockblock:	Chipboard
Lipping:	6mm hardwood complementing in colour

Lock Area

A lock-block is positioned centrally to one side of the door which is indicated by the word "LOCK" to the top edge. This is an area of 320mm high x 55mm wide.

Finish

Fully finished no further decoration is required to the faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.

The top of the door should not be trimmed due to the manufacturing identifications.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

FD30 35mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 35mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF573).

Construction

Flush face with softwood stiles and rails and complementing hardwood lippings. Over veneered with a flaxboard core.

Door Codes

Ash	ASHOV35F
Beech	BCHOV35F
Koto	KOTOV35F
Sapele	SAPOV35F
White Oak	WOKOV35F
Walnut	WALOV35F

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

3.2mm veneered wood fibre board.

Components

Stiles:	Softwood min 28mm (nominal width)
Rails (outer):	Softwood min 28mm (nominal width)
Rails (inner):	Chipboard min 38mm (nominal width)
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles maybe fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame. 1mm intumescent sheets are supplied with the door for use around lock/latch area.

Cutting of apertures or glazing on site is not permitted and invalidates the fire certification. Third party BWF-Certifire licensed processors are able to complete this ancillary work when required.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).

Construction

Flush face with complementing hardwood lippings.
Over veneered with a flaxboard core.

Door Codes

Ash	ASHOVF	White Oak Inlay	WOK1P
Beech	BCHOVF	White Oak Fusion	WOKHVSF
Koto	KOTOVF	Walnut Fusion	WALHVSF
Sapele	SAPOVF		
Walnut	WALOVF		
White Oak	WOKOVF		

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm complementing hardwood

Lock Area

Locks and handles may be fitted centrally in height either side of the door, maximum dimensions specified on installation instructions provided.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

No limit from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Cutting of apertures or glazing on site is not permitted and invalidates the fire certification. Third party BWF-Certifire licensed processors are able to complete this ancillary work when required.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

FD30 FRAMED 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF160).

Construction

Flush face with softwood stiles and rails and complementing hardwood lippings. Over veneered with a flaxboard core.

Door Codes

Ash	ASHOVFR
Beech	BCHOVFR
Koto	KOTOVFR
Sapele	SAPOVFR
Walnut	WALOVFR
White Oak	WOKOVFR

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	Softwood min 32mm (nominal width)
Rails (outer):	Softwood min 32mm (nominal width)
Rails (inner):	Flaxboard min 38mm (nominal width)
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm complementing hardwood

Lock Area

Locks and handles may be fitted centrally in height either side of the door, maximum dimensions specified on installation instructions provided.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge. The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Cutting of apertures or glazing on site is not permitted and invalidates the fire certification. Third party BWF-Certifire licensed processors are able to complete this ancillary work when required.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

FD60 54mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD60 54mm 60minute to BS476:Part 22: 1987 (CERTIFIRE CF331).

Construction

Flush face with complementing hardwood lippings to two edges.
Over veneered with a streboard core.

Door Codes

Ash	ASHOVFD	White Oak Inlay	WOK1PFD
Beech	BCHOVFD	White Oak Fusion	WOKHVSFD
Koto	KOTOVFD	Walnut Fusion	WALHVSFD
Sapele	SAPOVFD		
White Oak	WOKOVFD		
Walnut	WALOVFD		

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Core:	Streboard
Lockblock:	N/A
Lipping:	10mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note


The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 60 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.

All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Cutting of apertures or glazing on site is not permitted and invalidates the fire certification. Third party BWF-Certifire licensed processors are able to complete this ancillary work when required.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.

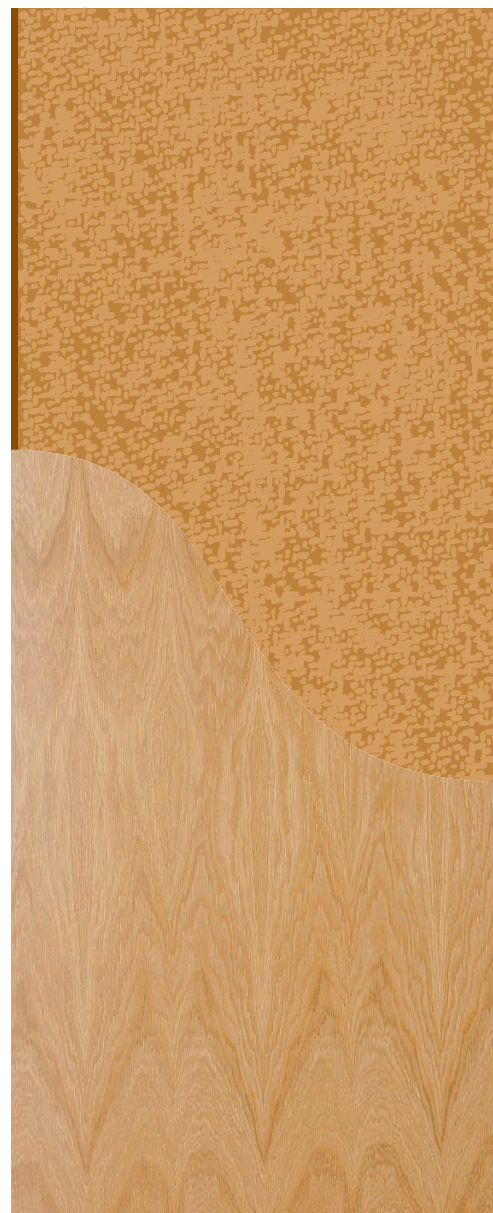

REAL WOOD VENEER

GC01/GW01 GLAZED FD30 44mm – INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear or 7.2mm PyroShield2 wired glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC01/GW01
White Oak	WOKOVF+GC01/GW01
Beech	BCHOVF+GC01/GW01
Sapele	SAPOVF+GC01/GW01
Koto	KOTOVF+GC01/GW01
Walnut	WALOVF+GC01/GW01

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC05/GW05 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear or 7.2mm PyroShield2 wired glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

	Clear Glazed
Ash	ASHOVF+GC05/GW05
White Oak	WOKOVF+GC05/GW05
Beech	BCHOVF+GC05/GW05
Sapele	SAPOVF+GC05/GW05
Koto	KOTOVF+GC05/GW05
Walnut	WALOVF+GC05/GW05

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC06/GW06 GLAZED FD30 44mm – INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear or 7.2mm PyroShield2 wired glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC06/GW06
White Oak	WOKOVF+GC06/GW06
Beech	BCHOVF+GC06/GW06
Sapele	SAPOVF+GC06/GW06
Koto	KOTOVF+GC06/GW06
Walnut	WALOVF+GC06/GW06

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC07 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 7mm Pyrodur Plus clear glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Door Codes	Clear Glazed
Ash	ASHOVF+GC07
White Oak	WOKOVF+GC07
Beech	BCHOVF+GC07
Sapele	SAPOVF+GC07
Koto	KOTOVF+GC07
Walnut	WALOVF+GC07

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC08 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 7mm Pyrodur Plus clear glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC08
White Oak	WOKOVF+GC08
Beech	BCHOVF+GC08
Sapele	SAPOVF+GC08
Koto	KOTOVF+GC08
Walnut	WALOVF+GC08

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC09 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC09
White Oak	WOKOVF+GC09
Beech	BCHOVF+GC09
Sapele	SAPOVF+GC09
Koto	KOTOVF+GC09
Walnut	WALOVF+GC09

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim


6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.

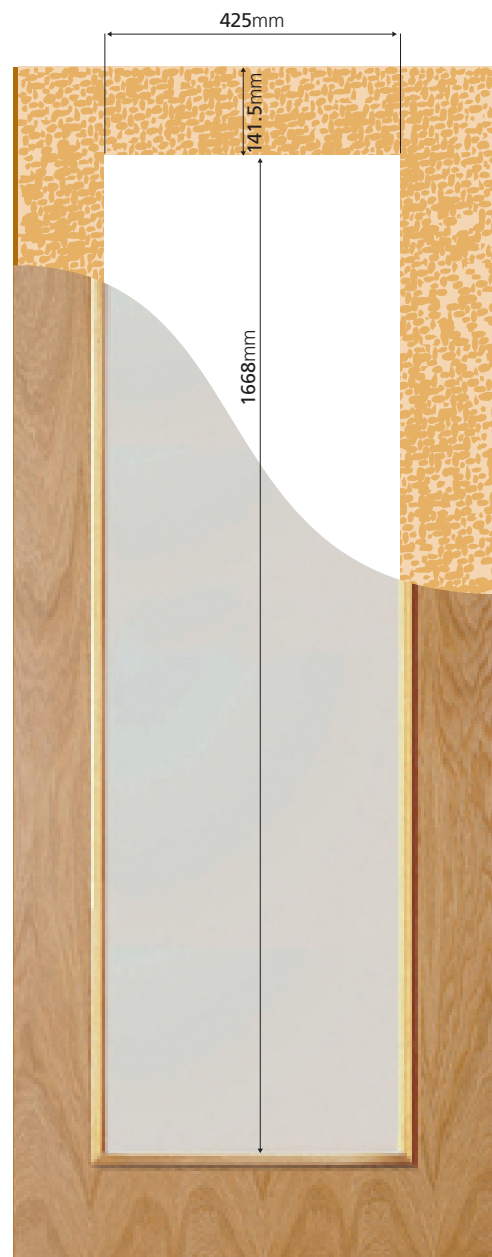

REAL WOOD VENEER

GC 10/GW10 GLAZED FD30 44mm – INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear or 7.2mm PyroShield2 wired glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC 10/GW10
White Oak	WOKOVF+GC 10/GW10
Beech	BCHOVF+GC 10/GW10
Sapele	SAPOVF+GC 10/GW10
Koto	KOTOVF+GC 10/GW10
Walnut	WALOVF+GC 10/GW10

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC11/GW11 GLAZED FD30 44mm – INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear or 7.2mm PyroShield2 wired glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC11/GW11
White Oak	WOKOVF+GC11/GW11
Beech	BCHOVF+GC11/GW11
Sapele	SAPOVF+GC11/GW11
Koto	KOTOVF+GC11/GW11
Walnut	WALOVF+GC11/GW11

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC12/GW12 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear or 7.2mm PyroShield2 wired glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC12/GW12
White Oak	WOKOVF+GC12/GW12
Beech	BCHOVF+GC12/GW12
Sapele	SAPOVF+GC12/GW12
Koto	KOTOVF+GC12/GW12
Walnut	WALOVF+GC12/GW12

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC13 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash
White Oak
Beech
Sapele
Koto
Walnut

Clear Glazed

ASHOVF+GC13
WOKOVF+GC13
BCHOVF+GC13
SAPOVF+GC13
KOTOVF+GC13
WALOVF+GC13

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles: N/A
Rails (outer): N/A
Rails (inner): N/A
Glazing framing: 6mm Hardwood liner
Glazing bead: Meranti or MDF
Core: Flaxboard
Lockblock: N/A
Lipping: 6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.



REAL WOOD VENEER

GC 14 GLAZED FD30 44mm

– INTERNAL FIRE DOOR

SPECIFICATIONS

Fire Rating

FD30 44mm 30minute to BS476:Part 22: 1987 (CERTIFIRE CF5143).
Glazed with 6mm Pyroclear glass.

Construction

Flush face with complementing hardwood lippings.
Over veneered face with a flaxboard core.

Door Codes

Ash	ASHOVF+GC 14
White Oak	WOKOVF+GC 14
Beech	BCHOVF+GC 14
Sapele	SAPOVF+GC 14
Koto	KOTOVF+GC 14
Walnut	WALOVF+GC 14

Clear Glazed

Moisture Content

10% (+/-2%) in accordance with BS:EN942.

Facings

0.6mm real wood veneer.

Components

Stiles:	N/A
Rails (outer):	N/A
Rails (inner):	N/A
Glazing framing:	6mm Hardwood liner
Glazing bead:	Meranti or MDF
Core:	Flaxboard
Lockblock:	N/A
Lipping:	6mm hardwood complementing in colour

Lock Area

Locks and handles may be fitted centrally in height either side of the door.

Finish

Fully finished no further decoration required to the two faces, finish the four edges with clear lacquer or varnish after trimming.

Maximum Trim

6mm from the bottom of the door and 4mm from each vertical edge.
The top of the door is not allowed to be trimmed due to the BWF-Certifire fire certification label and manufacturing identifications.

Installation Note

The doors have been tested to BS476 pt 22:1987 and are approved by BWF-Certifire of being capable of achieving 30 minute fire resistance when fitted in accordance with the installation instruction delivered with every door.
All doors must be fitted with intumescent strips to the top and sides of the door leaf or frame.

Maintenance

We recommend wiping down all surfaces with a clean damp cloth at least 4 times per year. We do not recommend using cleaning solutions or abrasive materials as this will damage the door.

